



प्रसार भारती
(भारत का लोक सेवा प्रसारक)
कार्यालय: अपर महानिदेशक अभियन्ता (उ.क्षे.)
आकाशवाणी एवं दूरदर्शन
आठवां तल, सूचना भवन, सी.जी.ओ. कॉम्प्लेक्स, नई दिल्ली 110003

SPEED POST



सत्यम् शिष्यम् सुन्दरम्

Dated: 16.04.2024

Subject: Draft Tender for Supply of Stereo & Digital Programme Input-Cum-Monitoring Rack at 52 Nos. of Stations.

1. Bidders are requested to offer their feedback on the **Draft Tender** Specification of the upcoming tender.
2. Bidders are requested to provide information about percentage of Make in India content in the proposed requirement as per latest and updated DPIIT guidelines.
3. Bidders are requested to submit budgetary quote of the proposed requirements.
4. Bidders are requested to submit the above detail on or before due date by e-mail to dirpur@gmail.com or at following address.

R.K.SINGH
Assistant Director (Engg.)
Room No. 899-C,
O/o ADG(E-NZ)
Akashwani & Doordarshan,
8th floor, CGO Complex,
Soochna Bhawan, New Delhi-110003

Specification for: Supply of Stereo & Digital Programme Input-Cum-Monitoring Rack at 52 Nos. of Stations.

Due Date to offer Comments: 01.05.2024

Enclosed:

1. Budgetary Quotation form for Supply of Stereo & Digital Programme Input-Cum-Monitoring Rack at 52 Nos. of Stations.
2. Specification No: PI Rack/20/June/2016-D(TD/FM)
3. Bill of material / Bill of Quantity.

R.K.SINGH

Assistant Director (Engg.)
For Add. Director General (NZ)

11732/P/2024/Purchase Section - Zonal Office(NZ)

प्रसार भारती/Prasar Bharati
(भारत का लोक सेवा प्रसारक)/(India's Public Service Broadcaster)
आयुक्त/प्रमुख/महानिदेशक/Directorate General: All India Radio
योजना एवं विकास एकक/Planning & Development Unit,
[एफ. एम. डिजाइन अनुभाग/FM Design Section]

No. Specs.PI Rack/12th Plan-9/4/2016-D(TD/FM)

Dated 12.08.2016

TECHNICAL SPECIFICATION COMMITTEE APPROVAL CERTIFICATE

Subject: Specifications for supply of Stereo & Digital Programme Input cum Monitoring Rack for FM Stations of All India Radio.

Ref: 12th Plan Documents

This has reference to above referred documents regarding the subject cited above. A meeting of the Technical Specification Committee was held on 10.08.2016 to discuss regarding the Specifications for supply of Stereo & Digital Programme Input cum Monitoring Rack for FM Stations of All India Radio by the Members of the Technical Specification Committee under the Chairperson DDG(E-FM) in Room No. 318, P&D Unit, DG: AIR, New Delhi.

The committee has prepared the Specifications for supply of Stereo & Digital Programme Input cum Monitoring Rack on the basis of earlier approved specifications. Accordingly a draft specification No. **PI Rack/20/June/2016-D(TD/FM)** for supply of Stereo & Digital Programme Input cum Monitoring Rack has been prepared and approved by the committee.


(P.K. SHARMA)
AE(FM), P&D Unit, DG: AIR
(Member)


(MANZOOR ALI)
AE(FM), P&D Unit, DG: AIR
(Member)


(S. HYDER)
DE(FM), P&D Unit, DG: AIR
(Member)

(ADITYA CHATURVEDI)
DE(AIR Projects), O/o ADG(E-NZ)
(Member)


(SATYENDRA KUMAR)
DDG(E-FM), P&D Unit, DG: AIR
CHAIRPERSON

1173124/2024/Purchase Section - Zonal Office(NZ)

MASTER COPY

Specification No: PI Rack/20/June/2016-D(TD/FM)

PRASAR BHARATI
(India's Public service Broadcaster)
DIRECTORATE GENERAL: ALL INDIA RADIO
(PLANNING & DEVELOPMENT UNIT)

File No: Specs. PI Rack/12th Plan-9/4/2016-D(TD/FM)

SPECIFICATION FOR SUPPLY OF STEREO & DIGITAL PROGRAMME INPUT CUM MONITORING RACK

SUMMARY:

S. No.	Description	Page No.
1.	Essential Requirements of tender	1-2
2.	Essential Eligibility Criteria for tenderer	2
3.	Section 1.0, General Specifications	3-5
4.	Section 2.0, Technical Specifications	5-15
5.	Section 3.0, Inspection	16
6.	Section 4.0 (A), Schedule of Requirements/Materials (Un-Priced)	16-17
7.	Section 4.0 (B), Schedule of Requirements/Materials (Un-Priced) (Optional)	17

A. ESSENTIAL REQUIREMENTS OF TENDER:

- (i) The tenderer should submit Schedule of Requirements/Materials of Supply **without price in the same format as given in Section-4.0 (A&B)** of All India Radio Specifications in the technical bid, failing which the tender shall be considered incomplete and is liable to be rejected.
(ii) It is also mandatory to mention **Make & Model of the offered equipment** in the Schedule of Requirements/Materials of Supply, failing which the tender shall be considered incomplete and is liable to be rejected.
- Each statement of this specification has to be complied with & supported by printed technical literature, technical data sheets, schematic drawings and technical manuals from the manufacturer/assembler of the equipment by the tenderer, to assess the merit of the offer without which the tender will be considered incomplete and is liable to be rejected.
- All the technical literature, technical data sheets, schematic drawings and Technical Manuals to be submitted by the tenderer must be signed & stamped on each and every page by the respective Original Equipment Manufacturer (OEM)/ Original Equipment Assembler (OEA) and countersigned by the tenderer, without which the tender will be considered incomplete and is liable to be rejected.
- The tenderer should submit the tender offer to All India Radio in the format given below, section wise & clause wise, in respect of all the sections of technical specifications. The tenderer must provide the page number reference, in column (4) of the table given below, of the Technical bid clearly indicating the volume number also, if any, for each supporting document to verify the parametric values shown in the technical specifications compliance statement, to assess the full merit of the offer, failing which tender shall be considered incomplete and is liable to be rejected.


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

S. No. of AIR Specifications (Section wise & Clause wise)	Details of All India Radio Specifications (Part/ Section wise & Clause wise)	Compliance (Yes/No)	The page No. of the tender offer, where the information/ supporting document is available.	Remarks
(1)	(2)	(3)	(4)	(5)
Section-1.0 Clause wise				
Section-2.0 Clause wise				
Section-3.0 Clause wise				
Section-4.0 (A&B) Clause wise				

5. The tenderer should quote the rate/cost of individual items in the tender offer while submitting the offer for spares (**OPTIONAL**) in commercial bid.
6. The complete Technical specifications (Section wise & Clause wise) compliance statement alongwith Schedule of Requirements/Materials (un-priced) must be signed & stamped on each page by the respective OEM/OEA and countersigned by the tenderer in the tender document including the clarifications, if any, asked by All India Radio, failing which the tender shall be considered incomplete and is liable to be rejected.
The OEM/OEA & tenderer should also mention their names in CAPITAL LETTERS & designation of the signatories, full address with pin code, phone number, fax number, e-mail addresses etc.
7. All the volumes of the entire technical bid must be page numbered.
8. The authorization and guarantee must be given by respective OEM/OEA on their letter head pad duly signed & stamped on each page. In case tender offer is from other than the Original Equipment Manufacturer, the tenderer must also give guarantee on their letter head pad duly signed & stamped on each page, failing which the tender shall be considered incomplete and is liable to be rejected.
9. Any change in the AIR technical specifications format or language or in parameters or of any other nature including the deletion of technical specifications clause, words, lines in the technical specifications compliance statement by the OEM/OEA/tenderer will not be acceptable to AIR and the tender is liable to be rejected.
10. *Optional items will not be considered for ranking purpose.*

B. ESSENTIAL ELIGIBILITY CRITERIA FOR THE TENDERERS:

The criteria for this will be decided by the Zonal Office.


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

SECTION-1.0GENERAL SPECIFICATIONS:

1.0 Stereo & Digital Programme Input-Cum-Monitoring Rack as per AIR specification shall be used round the clock for continuous operation without any interruption in VHF FM broadcast service at AIR station.

1.1 Please refer tender documents for general terms and conditions of contract for supply including all the commercial aspects like; Packing and packing list, Insurance and Marine Risk etc. Payment terms, Penalty/Compensation for delay, Damages and liabilities, Time Period and Extension for Delay, Foreclosure of contract due to Abandonment or Reduction in scope of supply, Cancellation of contract in full or part, Recovery of security deposit, Performance Guarantee, Unsatisfactory workmanship, Damages incurred during transit, tenderer liable for damages, Defects, Recovery of compensation, Ensuring payment and amenities, tenderer to indemnify Government against Patent Rights, Release of security deposit, Safety Code, insurance from manufacturer's works/factory to respective site etc. i.e. in totality.

1.2 INSPECTION:

- 1.2.1 Detailed inspection of Stereo & Digital Programme Input-Cum-Monitoring Rack will be carried out at Delhi in India by Engineers of All India Radio as per details given in Section-3.0.
- 1.2.2 Prior intimation for carrying out inspection at OEM/OEA's works is to be given by the tenderer to All India Radio at least **2 weeks** in advance alongwith all the testing/measurements of Stereo & Digital Programme Input-Cum-Monitoring Rack as per parameters in Section-3.0 as per approved ATP.
- 1.2.3 For AIR inspecting engineers, boarding, lodging etc. will be borne by All India Radio (if required).
- 1.2.4 The complete Acceptance Test Procedure/Protocol (ATP) will be prepared by the OEM/OEA and submitted to the concerned Zonal office for approval **within one month** of issue of Acceptance of Tender. ATP will also indicate full details of setup for measuring/testing equipments to be deployed during the performance measurements/inspection. The **approved** ATP shall form the basis for performance measurements/inspection to be carried out.

1.3 INFORMATION TO BE SUPPLIED WITH THE TENDER:

- (i) The complete technical specifications (Section wise & Clause wise) compliance statement alongwith Schedule of Requirements/Materials (un-priced) duly signed & stamped on each page by the respective Original Equipment Manufacturer (OEM)/ Original Equipment Manufacturer (OEA) and countersigned by the tenderer as per the format given above in clause A (4).
- (ii) Complete printed technical literature/technical data sheet/schematic drawings/detailed information including Technical Manual of Stereo & Digital Programme Input-Cum-Monitoring Rack as per Section-4.0 (A&B), duly signed & stamped by the respective Original Equipment Manufacturer of the offered equipment & countersigned by the tenderer in support of compliance statement should be furnished, to assess the full merit of the offer, without which the tender offer will be considered incomplete and is liable for rejection.
- (iii) Detailed Schedule of Requirements/Materials (un-priced) for the supply of Stereo & Digital Programme Input-Cum-Monitoring Rack should be in conformity with Section-4.0 (A&B) without any change in the format, failing which, the tender will be considered incomplete and is liable for rejection. The tenderer must quote all items.
- (iv) Descriptive information and complete details of each equipment offered shall be given by the tenderer.


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

- (v) Country of Origin, Make, Type & Model of all the offered items should be mentioned including the name & address of their vendors.
- (vi) The performance figures of the offered equipment/items must be given by the tenderer, to assess the merit of the offer without which the tender will be considered incomplete and is liable to be rejected.

1.4 INFORMATION TO BE SUPPLIED BY THE TENDERER WITHIN ONE MONTH AFTER ISSUE OF ACCEPTANCE OF TENDER:

One set of Technical Manuals (for Installation, Testing, Commissioning, Operation & Maintenance, including theory of operation and fault diagnosis) **COLOUR** printed and duly bound for Stereo & Digital Programme Input-Cum-Monitoring Rack alongwith soft copy on CD must be supplied to concerned Zonal Office.

1.5 INFORMATION TO PRECEDE DESPATCH OF EQUIPMENT:

Following information should be supplied to the concerned Zonal Office and each of the consignee, two months prior to dispatch of Equipment:

- Detailed list of equipment under dispatch.
- Photograph showing location of various units/sub units with item numbers marked thereon.

1.6 INFORMATION TO BE SUPPLIED ALONGWITH EQUIPMENT:

Technical manuals (for Installation, Testing, Commissioning, Operation & Maintenance, including theory of operation and fault diagnosis) **COLOUR** printed and duly bound for Stereo & Digital Programme Input-Cum-Monitoring Rack and OEM/OEA test certificate with soft copy on CD shall be supplied as per Section-4.0 (A&B).

1.7 GUARANTEE:

The tenderer shall submit with his tender an undertaking to accept the following guarantees:

- The guarantee of the Equipments/items shall be 36 months from the date of receipt of Equipments/items by consignee in good condition.
- A guarantee that the equipment supplied will be in accordance with these specifications, varied only to the extent stated in his tender and agreed to in the contract.
- A guarantee to make good within 10 days at tenderer's expense, if any component which becomes defective under normal operating conditions during guarantee period.
- A guarantee to supply all components for a period of ten years from the date of acceptance of Equipments/items, at rates at which these are being supplied by him to other customers and also should match prices of original manufactures of these components prevailing at that time.
- If at any stage during next 10 years, the manufacturer stops production of this model of Equipments/items, the tenderer/OEM shall intimate All India Radio in advance to enable the latter to stock the critical items.

1.8 LANGUAGE/UNITS:

All information supplied by the tenderer & all markings, notes, designation on the drawings & associated write-ups shall be in "**English language**" only.

All dimensions, units on drawings, all references to weights, measures & quantities shall be in SI Units.

1.9 DELIVERY OF EQUIPMENT:

Six (6) months from the date of issue of Acceptance of Tender.


(Munzoor Ali, AE)


(P.K. Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

1.10 PACKING AND PACKING LISTS:

All the equipment should be securely and properly packed to withstand transit hazards. Equipment packing shall be fit for sea freight and incorporate adequate protection against ingress of moisture. Packing slips giving details of the items contained in each package shall be placed inside the package in a water proof envelop to enable easy identification and should contain cross references to item/part numbers of installation drawings/components lists. Copies of packing slips and other details should be sent separately to respective consignee and also to the concerned Zonal Office.

1.11 INSURANCE AND MARINE RISKS ETC:

Please refer to commercial terms.

1.12 MAINTENANCE SUPPORT AND SPARES:

- (a) The minimum recommended essential spares shall be quoted separately by the tenderer.
- (b) The minimum recommended essential spares may be based on predicted rate of failure.
- (c) In case, the tenderer quotes the optional items as 'Set', the details of the components/items offered in the 'Set' must be spelt out clearly including their Make & Model and quantity.

SECTION 2.0**1.0 The Stereo & Digital Programme Input-Cum-Monitoring Rack should be suitable for:**

- i) Feeding Stereo programmes to VHF FM transmitters.
- ii) Feeding Digital programmes to VHF FM transmitters.
- iii) Metering and monitoring of different programme inputs as per (i) and (ii) as above as well as signal at intermediate points in the audio chain and also detected signals.

Detailed specifications of rack and individual equipments are given below:

2.0 GENERAL AND BRIEF DESCRIPTION OF REQUIREMENTS:

- 2.1 Suggestive Block Schematic (Drg. No. TM-15913) of the Stereo & Digital Programme Input-Cum-Monitoring Rack is enclosed for reference. However tenderer is required to provide complete equipment schematic diagram, wiring diagram and other technical details of the offered Stereo & Digital Programme Input-Cum-Monitoring Rack.
 - 2.2 All audio lines from the Jacks & Equipments are to be connected to a terminal block to be located near the bottom of the rack for external feeding of cables by All India Radio. All the equipments are to be properly earthed with the existing equipment earthing system in the transmitter hall.
 - 2.3 RFI/EMI filter shall be provided at mains input of the Stereo & Digital Programme Input-Cum-Monitoring Rack as per relevant standard provisions for effective rejection of the interference from the high power transmitters operating in the premises.
- These Stereo & Digital Programme Input-Cum-Monitoring Rack will be used in High Power Transmitter halls (upto 250 kW transmitter RF output power) i.e. the rack with full complement of equipment as to operate in a high RF field. As such all the specifications of the individual equipment as well as the full chain, are to remain valid in high RF fields.


(Manzoor Ali, AE)


(RK.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

- 2.4 The main Rack will be used to install various equipment as per in Schedule of material /requirement for supply (unpriced). The rack will be of standards 19" equipment width size. The frame of the rack shall be of high quality extruded aluminum or high grade steel material as per IS code amended up to date. The aluminum profiles shall be either anodized or powder coated and the steel parts shall give pleasing and aesthetic look and superior and long lasting paint finish. The rack is to be of sturdy design. The thickness of main frame section shall be greater than or equal to 1.6 mm and for covers greater than or equal to 1.2 mm. The approximately overall size of rack shall be 2250(H) (Usable height 42 U) × 550 (W) × 700 (D) mm. The final equipment lay out and Jack wiring drawing is required to be submitted by the tenderer and got approved from All India Radio after the placement of Supply Order.
- 2.5 The rack shall be fitted with jack strips [2 Nos. Jack strip for analogue and 2 Nos. Jack strip for digital] as per specification. Separate jack strips shall be provided for Digital and Stereo inputs.
- 2.6 Blank panels for above rack shall be supplied for coverage of blank space in the racks.

2.7 General requirements.

(i)	Accessories: The equipment shall be supplied complete with all mating connectors, input output cords and power supply cords. Lamps and cooling fans are to be fixed in the rack.
(ii)	The rack is to be supplied complete with all cabling/wiring/connectors.
(iii)	The equipment shall be completely modular in design for easy maintenance and replacement. Photographs showing exterior and interior of each equipment to be forwarded with tender.
(iv)	Spares: Essential and recommended spares components shall be quoted separately based on failure pattern. a) Cooling fan b) Any other item as per recommendation of Manufacturer
(v)	Earthing & RF Shielding: An earth terminal shall be provided in the rack body for connecting audio earth connection. RF Shielding shall be provided by the tenderer.
(vi)	The following equipment will also be installed in this rack in addition to equipment/items mentioned in Schedule of material /requirement for supply. (un-priced): Stereo FM Digital Audio Broadcast Processor (2 Nos.), FM Mono and Stereo Modulation Monitor including RF Amplifier & Tone generator.
(vii)	AC POWER SUPPLY DISTRIBUTION: The power supply distribution is to be provided with an MCB in the incoming circuit. Necessary RF filter is to be provided. The entire system is to operate on single phase supply. 5/15 Amps. 6 pin sockets are to be provided at different levels for various equipments.
(viii)	DC SUPPLY: In case any of the Rack equipment is to operate on a separate DC Supply, one such unit is to be offered as spare and price are to be quoted separately.

3.0 TECHNICAL SPECIFICATIONS:

3.1 STEREO MODE:

(i)	Input	6 Nos. active balanced for L & R separately
(ii)	(a) Level Nominal	- 6 to +6 dBu (adjustable in steps of 1.0 dB)
	(b) Level Maximum	+20 dBu

(Manzoor Ali, AE)

(P.K. Sharma, AE)

(Aditya Chaturvedi, DE)

(S. Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

(iii)	Input Impedance	600 Ω /10 k Ω or higher, balanced & floating
(iv)	Output at selection	4 Nos., L & R balanced & floating
(v)	Nominal Level	+6 dBu
(vi)	THD + N (30 Hz to 20 kHz)	Better than 0.1%
(vii)	Impedance	50 Ω or less, balanced
(viii)	Frequency response (30 Hz to 20 kHz)	Better than ± 0.5 dB
(ix)	Inter Channel Cross talk at 15 kHz between any two unrelated channels.	Better than 70 dB
(x)	Phase difference, L/R	Better than 3 degrees
(xi)	S/N (rms) unweighted (30 Hz to 20 kHz)	Better than 80 dB

3.2 DIGITAL MODE:

(i)	Configuration	AES/EBU standard, 24-bit resolution.
(ii)	Sampling Rate	32, 44.1 or 48 kHz automatically selected.
(iii)	Connector	XLR-type, female, EMI-suppressed.
(iv)	Input reference level	Variable within the range of -20.0 to 0.0 dBFS

4.0 STEREO & DIGITAL INPUT SELECTOR (BALANCED) (SOLID STATE BASED):

Different Stereo & Digital programme inputs dual selector (Solid State based) will be available at input of the rack. The above selector shall select one of these programmes at the output. Selected position will be indicated by LED's/bar graph.

4.1 STEREO INPUT SELECTOR (Solid State based):

Different Stereo programme inputs selector (Solid State based) will be available at input of the rack. The above selector shall select one of these programmes at 4 independent outputs. Selected position will be indicated by LED's/ self illuminated switch.

Technical Parameters:

(i)	Number of Stereo inputs	6 Nos. with XLR connectors
(ii)	Output requirement	4 Nos. with XLR connectors
(iii)	Selection	By push buttons with solid state or relay switching, with memory.
(iv)	Indication by	LED's
(v)	Input/Output Isolation	90 dB
(vi)	Output/ Input Isolation	90 dB
(vii)	Frequency response (30 Hz to 20 kHz)	Better than ± 0.5 dB
(viii)	THD + N (30 Hz to 20 kHz)	Better than 0.1%
(ix)	S/N (rms) unweighted (30 Hz to 20 kHz)	Better than 80 dB

4.2 DIGITAL INPUT SELECTOR (Solid State based):

Different Digital programme inputs selector (Solid State based) will be available at input of the rack. The above selector shall select one of these programmes at 4 independent outputs. Selected position will be indicated by LED's/ self illuminated switch.


(Manjoor Ali, AE)


(P.K. Sharma, AE)


(Aditya Chaturvedi, DE)


(S. Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

Technical Parameters:

(i)	Configuration	AES/EBU standard, 24-bit resolution.
(ii)	Number of Digital inputs	5 Nos. with XLR connectors
(iii)	Output requirement	4 Nos. with XLR connectors
(iv)	Sampling Rate	32, 44.1 or 48 kHz automatically selected.
(v)	Selection	By push buttons with solid state or relay switching, with memory.
(vi)	Indication by	LED's/ Bargraph
(vii)	Impedance	110 Ω

5.0 Metering & Monitoring selector for Stereo & Digital (Solid State based):

5.1 Metering Selector: This selector is to be used for selecting any one of the Digital & Stereo inputs for the purpose of metering. Selected position is to be indicated by LED display/bar graph. Necessary D/A solid state converters are to be included and provided by the tenderer

5.1.1 Stereo Mode:

(i)	Number of Input	1 No. with XLR connector
(ii)	Selection	By push buttons for stereo or digital mode
(iii)	Indication by	LED Display

5.1.2 Digital Mode:

(i)	Configuration :	AES/EBU standard, 24-bit resolution.
(ii)	Number of Input	1 No. with XLR connector
(iii)	Selection	By push buttons for stereo or digital mode
(iv)	Indication by	LED Display

5.2 Monitoring Selector: This selector is to be used for selecting any one of the Digital & Stereo inputs for the purpose of monitoring. Selected position is to be indicated by LED display/bar graph. Necessary D/A solid state converters are to be included and provided by the tenderer

5.2.1 Stereo Mode:

(i)	Number of Inputs	2 Nos. with XLR connector
(ii)	Selected Output	1 No. with XLR connector
(iii)	Selection	By switch

5.2.2 Digital Mode:

(i)	Configuration :	AES/EBU standard, 24-bit resolution.
(ii)	Number of Inputs	1 No. with XLR connector
(iii)	Selected Output	1 No. with XLR connector

(Manzoor Ali, AE)

(P.K.Sharma, AE)

(Aditya Chaturvedi, DE)

(S.Hyder, DE)

40/595/34

1173209/2024/Purchase Section - Zonal Office(NZ)

Specification No: PI Rack/20/June/2016-D(TD/FM)

6.0 PRECISION INSTRUMENT QUALITY, STEREO DISPLAY UNIT:

The levels of selected signals are to be indicated on L&R bar graphs. Indication should be by suitable bar graph meter. Selection should not load the circuit.

6.1	Indication by	LED bar graph minimum of 20 elements, in three colours.
6.2	Value	Peaks, with selector switch
6.3	Measuring range	-20 to +24 dBu switchable pad/pads may be provided to change the reference level of bar graph as the maximum level to be displayed is +24 dBu.
6.4	Resolution	Better than 2 dBu in the range -20 to 0 dBu & 1 dBu in range 0 dBu to +24 dBu.
6.5	Frequency response	Better than ± 0.1 dB (30 Hz to 20 kHz)

7.0 STEREO & DIGITAL MONITORING AMPLIFIER

The monitoring amplifier is to be provided for monitoring of programme as selected by the selector switch and will be provided with a set of 2 high quality speakers for L/R channels.

7.1 SPECIFICATION FOR 40 WATTS STEREO & DIGITAL MONITORING AMPLIFIER:**7.1.1 GENERAL:**

This specification pertains to professional Stereo & Digital monitoring amplifier for use in transmitter centers.

The amplifier shall be able to deliver an output of 40 Watt RMS and 200 Watt Peak Music Power Out put (PMPO) per channel with both channels driven at 1 kHz at nominal input level.

The amplifier shall be capable of continuous operation round the clock without degradation in performance. Amplifier will operate on AC main single phase power supply.

7.1.2 Technical:

The amplifier shall essentially have the following features:

7.1.2.1	<u>Protection against current over-loads:</u> The amplifier should mute in case of overload and revert to normal functioning once overload ceases to exist.
7.1.2.2	<u>Protection against thermal overload:</u> Temperature of power pack and heat sinks of both channels should be monitored and the amplifier should get muted with a visual indication whenever temperature exceeds permissible limits. In case of excessive temperature of heat sinks, the amplifier should be protected by fuse blow up or by any other suitable measures.
7.1.2.3	Monitoring amplifier output should be continuously monitored for DC components or very low frequency components which might endanger speakers if present for longer durations. Amplifier output should get blocked in such an eventuality.
7.1.2.4	The amplifier should have protection against open circuit, full short circuit, ultrasonic frequencies and high RF fields
7.1.2.5	It should be switchable to stereo and dual mono operating modes.
7.1.2.6	Necessary function switches such as volume/gain control, low and high pass filters should be available on front panel. These controls shall be rugged and reliable.

(Manzoor Ali, AE)

(P.K.Sharma, AE)

(Aditya Chaturvedi, DE)

(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

7.1.3	INPUTS:	
7.1.3.1	No. of inputs (Stereo)	1 No. (30 Hz to 15 kHz)
7.1.3.2	Input level	-10 dBu to +10 dBu for rated output
7.1.3.3	Input impedance	10 k Ω or higher (balanced)
7.1.3.4	CMRR (20 Hz - 20 kHz)	Better than 60 dB

7.1.4	OUTPUT:	
7.1.4.1	Power output	40 Watt RMS at 8 Ω nominal impedance at suitable terminals.
7.1.4.2	Frequency Response with reference to 1 kHz over the entire range (40 Hz to 15 kHz)	Better than ± 0.5 dB
7.1.4.3	THD+N at 1 kHz	Better than 0.25% at rated output
7.1.4.4	S/N with input shorted and at rated output (unweighted rms) at 0 dBu input (20 Hz - 20 kHz)	Better than 80 dB
7.1.4.5	Damping Factor	Better than 75 into 8 Ω at < 1 kHz.
7.1.4.6	Level difference between the Channels	Equal to or less than 0.5 dB
7.1.4.7	Phase difference between the Channels	Better than 20 degree, (40 Hz to 15 kHz.)
7.1.4.8	Inter Channel Cross talk at 15 kHz	Better than 70 dB at nominal level.

7.1.5	DIGITAL AUDIO INPUT	
7.1.5.1	Configuration	Stereo AES/EBU standard, 24-bit resolution.
7.1.5.2	Sampling Rate	32, 44.1 or 48 kHz automatically selected.
7.1.5.3	Connector	XLR-type, female, EMI-suppressed.
7.1.5.4	Input reference level	Variable within the range of -20.0 to 0 dBFS.

7.1.6 MECHANICAL:

The amplifier should be 19" rack mounting type for mounting in a rack.

8.0 SPECIFICATION FOR STEREO LOUDSPEAKERS SYSTEM**8.1 GENERAL:**

The loudspeakers system shall be high fidelity two way speaker system based on state of the art technology. The enclosure of the speaker shall be of rugged structure and of attractive design.

The front grill attached to the enclosure shall be attractively designed, acoustically transparent and shall be fixed rigidly so that it does not vibrate.

The tenderer should submit typical plots of Impedance vs Frequency, Amplitude vs Frequency, Phase vs Frequency and Polar pattern.

8.2 TECHNICAL SPECIFICATIONS:**8.2.1 POWER HANDLING CAPACITY:**

The power handling capacity of each speaker should not be less than continuous RMS :
100 Watts (for each channel)

8.2.2 Frequency Response: The speaker system should have frequency response within ± 3 dB between 45 Hz to 20 kHz with respect to 1 kHz. The frequency response curve shall be submitted with tender and shall be supplied with each unit.


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S. Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

- 8.2.3 Over load Protection: The speaker should be protected against momentary peak overloads upto 6 dB above rated power handling capacity.
- 8.2.4 Nominal Impedance:
Nominal Impedance of 8Ω shall be offered. Impedance Vs Frequency plot shall be submitted with tender and shall be supplied with each unit.
- 8.2.5 Sensitivity: At 1 watt input (2.8 Volts across 8Ω), each speaker system shall produce SPL of 90 dB or more at a distance of 1 M on axis.
Distance of apparent acoustic source behind front surface shall be specified.
- 8.2.6 Directivity: The Q - factor of the speaker system shall be specified. Polar response of the speaker system shall be supplied for both horizontal and vertical plane in each unit.
- 8.2.7 Matching:
The two loudspeakers shall conform to the above requirements and shall be a matched pair as regards their sensitivity, frequency response, phase response and polar pattern.
- 8.2.8 Phase Response: The system should behave as a frequency independent time delay. Phase Vs Frequency response curve shall be submitted with tender.
- 8.2.9 Dimensions finish and weight of the speaker shall be specified by the tenderer.
- 8.2.10 Accessories: Matching transformer as required shall be supplied with the unit.

9.0 STEREO HEADPHONES:

- 9.1 GENERAL: The headphone shall be designed to reproduce full audio spectrum faithfully (without any colouration) for quality monitoring in broadcast studios. It shall be light weight in construction and shall have provision for stereo/mono monitoring. Left and right ear-pieces shall be matched to reproduce stereo images correctly. The provision shall exist for parallel wiring of the left and right systems for mono monitoring.

9.2 ELECTRICAL REQUIREMENTS:

The headphone shall conform to the following electrical requirements:

9.2.1	Frequency range	The headphone shall reproduce faithfully a range of 40 Hz – 16 kHz. A typical frequency response curve shall be submitted along with the tender.
9.2.2	Electrical impedance	$2 \times 600 \Omega \pm 10\%$
9.2.3	Sensitivity at 1 kHz	90 dB SPL for 1 mW input.
9.2.4	Max-power handling capacity	200 mW.
9.2.5	Total Harmonic Distortion	$\leq 1\%$ at max. Permissible input level.


9.3 MECHANICAL REQUIREMENTS:

The diaphragm may be made of hard polyvinyl chloride or similar material and housed in polystyrene housing. The ear cushions shall be circumaural and may have foam filled material. The headphone shall be comfortable for extended use.

The headphone shall further conform to the following mechanical requirements:


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Jyoti, DE)

117321/2024/Purchase Section - Zonal Office(NZ)

Specification No: PI Rack/20/June/2016-D(TD/FM)

- 9.3.1 The head strap shall be made of spring steel wire encased in or supported by leather or flexible plastic and the length shall be adjustable.
- 9.3.2 Average pressure on ears: Max. 4 N
- 9.3.3 Cord of at least 1.6 M length shall be provided. The cord may be detachable.
- 9.3.4 Standard Stereo/Mono Phone plug 6.35 mm dia. shall be provided as required.
- 9.3.5 Weight of the headphone without cord shall not exceed 250 grams.

10.0 STEREO AF JACK STRIP PANELS:**10.1 GENERAL DESCRIPTION:**

The Stereo audio jack strip panels shall be used for Stereo audio patching and termination in Broadcast Studios. The jack strip shall be of 2U height containing 20 jacks in each of two rows (one for left and other for right signal). The jack strip shall be suitable for mounting on standard 19" equipment rack. There shall be provision for fixing of removable legend strip with plastic cover on top/bottom of the jacks. The jack strip shall be wired with twin core shielded audio cable conforming to AIR specification.

All inner and outer contacts of jacks shall be wired to the tag block. Inter connections shall be made at the tag block.

The length of audio cable bunch shall be such that the jack strips can be mounted at a height of 1500 mm or below for full size racks through proper routing of cable bunch. The wiring bunches shall be neatly laid and clamped to the body of the rack with adequate flexibility affording pulling of jack strip outside the rack on its front without strain on cables for attending to jack wiring. The wires shall be suitably marked with ferrules on both ends for easy identification.

10.2 JACK STRIP SPECIFICATION:

10.2.1	Jack Panel	General purpose black phenolic resin
10.2.2	Frame	Plated, steel or aluminum
10.2.3	End Bracket and side Strip	Cold rolled plated steel or aluminum
10.2.4	Designation Channel	On top/bottom of jack strip
10.2.5	Marking Strip	White plastic, matt finish
10.2.6	Marking Strip Cover	Clear extruded plastic
10.2.7	No. of Jacks in each row	20, placed at equal distance centre to centre

10.3 JACK CONSTRUCTION:

The jack shall have rugged steel frame, press welded with copper alloy corrosion resistant springs. The contact shall be of welded crossbar palladium/gold for providing reliable, low resistance and long life contact. The jack shall be 20 point jack providing break on both wires and an isolated offset earthing lug. The jacks shall have soldered tinned lug terminals. Make, type and technical details and drawings of jacks are to be supplied with the tender.


(Munzoor Ali, AE)


(P.K. Sharma, AE)


(Aditya Chaturvedi, DE)


(S. Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

10.3.1 TECHNICAL SPECIFICATION OF JACKS:

(i) Electrical:

(a)	Contact Resistance	0.05 Ω maximum
(b)	Insulation Resistance	1000 mega Ω min.
(c)	Dielectric withstanding	500 VRMS AC voltage

(ii) Mechanical:

(a)	Bushings	Plated copper alloy bushings to accept standard 6.35 mm/0.25 inch dia. plug
(b)	Insertion Force	7 lb (3.17 kg) maximum
(c)	Withdrawal Force	1.5 lb (0.679 kg) minimum
(d)	Life	Min. 20,000 insertion/withdrawal cycles
(e)	Vertical Spacing	0.625 \pm 0.01 inch centre to centre between jacks for Stereo

11.0 STEREO AF PATCH CORDS

STEREO AF PATCH CORDS:

Two jacks will be joined together to form Stereo Set. Colour of Jacks/Sleeves and audio cables will be different to indicate L/R clearly.

11.1 PATCH CORDS WITH MATCHING PLUGS:

These shall be supplied in lengths of 3' and 6' with 6.35 mm/0.25 inch dia. twin plugs at both ends of the patch cord. Individual plugs will have tip, ring and sleeve construction with complete continuity of thermoplastic insulation between plug elements. Two of these plugs are to be placed into handles to provide a twin-plug at each end of the patch cord. The two are electrically independent 3 conductor plugs spaced 0.625 inch centre to centre, with self-alignment feature. The plugs shall be made of Nickel-plated brass with black Bakelite molded cover.

The patch cord shall be made of 14/68 standard copper wire covered with insulating material with 98% tinned copper braided shielding and black thermoplastic outer braid woven over insulated conductors and shield. Make, type, origin and technical specification of patch cords are to be submitted along with the tender.

12.0 RF CONNECTOR:


4 Nos. of RF adapters are also to be provided. These are to be used for feeding RF power to Demodulators or Analyzer. These connectors are to be of BNC type.

13.0 DISTRIBUTION AMPLIFIERS:

The analogue Stereo and Digital Distribution Amplifier will be used for feeding an analogue Stereo and Digital programme to various destinations.


(Manoj Kumar, AE)


(P.K. Sharma, AE)


(Aditya Chaturvedi, DE)


(S. Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

The analogue stereo distribution amplifier should be solid state audio amplifier having one stereo input and 4 separate individually adjustable stereo outputs.

The Digital Distribution Amplifier should be solid state having one digital input and 4 separate digital output.

13.1 ANALOGUE STEREO DISTRIBUTION AMPLIFIER:

1. **INPUT IMPEDANCE:**
Input impedance shall be $\geq 10 \text{ k}\Omega$ (balanced).
2. **INPUT LEVEL:**
(a) Nominal : 0 dBu
(b) Maximum : +20 dBu
3. **GAIN:**
Shall have adjustable gain of $\pm 5 \text{ dB}$ with respect to nominal setting.
4. **OUTPUT LEVEL:**
(a) Nominal : 0 dBu
(b) Maximum : +20 dBu
5. **OUTPUT IMPEDANCE:**
Output impedance shall be $\leq 50 \Omega$ (balanced).
6. **FREQUENCY RESPONSE:**
 $\pm 0.5 \text{ dB}$ in frequency range of 40 Hz to 20 kHz.
7. **TOTAL HARMONIC DISTORTION:**
Less than 0.1% at nominal level (1 kHz) and less than 0.5% at maximum output level. (Terminated into a load of 600 Ω) throughout the audio frequency range of 40 Hz to 20 kHz.
8. **SIGNAL TO NOISE RATIO AT NOMINAL INPUT/OUTPUT, RMS UNWEIGHTED (22 Hz-22 kHz):** $\geq 90 \text{ dB}$
9. **INTER OUTPUT LOADING:**
(a) If one of the outputs gets short circuited, the level on the rest of the outputs shall not fall by more than 0.3 dB.
(b) If two of the outputs got short circuited, the level on each of the remaining outputs shall not fall by more than 0.6 dB.
10. **INTER-CHANNEL PHASE DIFFERENCE:**
Not more than 5 degree in frequency range of 125 Hz to 10 kHz and 10 degree from 40 Hz to 20 kHz.
11. **INTER-CHANNEL LEVEL DIFFERENCE:**
Within $\pm 0.5 \text{ dB}$, from 40 Hz to 20 kHz.
12. **INTER-CHANNEL CROSS TALK:**
Equal to or better than 60 dB at 20 kHz at nominal level.
13. **INPUT/OUTPUT CONNECTORS:**
Input and all outputs shall be on 3-pin XLR connectors.

13.2 DIGITAL DISTRIBUTION AMPLIFIER:

DIGITAL AUDIO INPUT		
(i)	Configuration	AES/EBU standard, 24-bit resolution.
(ii)	Sampling Rate	32, 44.1 or 48 kHz automatically selected.
(iii)	Connector	XLR-type, female, EMI-suppressed.
(iv)	Input reference level	Variable within the range of -20 to 0 dBFS.

(Manzoer Ali, AE)

(P.K.Sharma, AE)

(Aditya Chaturvedi, DE)

(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

DIGITAL AUDIO OUTPUT		
(i)	Configuration	AES/EBU standard, 24-bit resolution.
(ii)	Sample Rate	32, 44.1 or 48 kHz, selected in software
(iii)	Connector	XLR-type, male, EMI-suppressed.
(iv)	Impedance	110 Ω

14.0 AUDIO WIRING:

AUDIO WIRING: All audio wiring will be carried out with high quality 2 core shielded Teflon multi strand tinned copper Audio Cable. Technical details of the offered audio cable are required to be enclosed with tender by the tenderer.

14.1. GENERAL DESCRIPTION:

This cable is required for wiring of jack strips in audio equipment racks in Broadcast Studios/ Transmitting stations.

14.2 CORES:

Two cores, twisted. Each core conductor to be formed of 7 strands of 0.193 mm dia. (36 SWG) annealed tinned copper wire conforming to IS: 8130 amended to date or higher number of strands of thinner gauge to give equivalent core cross section for better flexibility.

14.3 CORE INSULATION:

Each core conductor shall have PVC insulation of minimum radial thickness of 0.3 mm, conforming to type-I of IS: 5831 amended to date. The cores shall be color coded black and red or any other distinguishing color code.

14.4 FINISH AND SHIELDING:

The two cores shall be twisted together so as to give circular cross section to the cable for maximum flexibility. The shielding shall consist of about 80 strands of minimum 40 SWG annealed tinned copper wires closely woven in groups of 4-6 strands to give at least 98% coverage.

14.5 SHEATH:


The sheath over the shielding shall be of PVC of nominal thickness of 0.3 mm conforming to type 6 of IS: 5831 amended to date.

14.6 OVERALL DIMENSION: As per IS.**14.7 SPARES (OPTIONAL):**

Necessary spares required for the maintenance of the equipment should also be quoted separately. All India Radio at its own discretion may procure essential spares for a value not exceeding 10% of the cost of equipments. All the tenderer should quote all the essential spares.


(Manzoor Ali, AE)


(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

SECTION 3.0**INSPECTION DETAILS**

The inspection for acceptance of the Stereo & Digital Programme Input-Cum-Monitoring Rack will be carried out at Delhi in India by Engineers of All India Radio in accordance with Acceptance Test Procedure/Protocol (ATP). All facilities like complete set of measuring instruments, power supply, manual assistance etc. will be provided by the tenderer. Complete details and specifications of the Stereo & Digital Programme Input-Cum-Monitoring Rack will be checked and all parameter values will be measured.

It is mandatory that all these checking and measurements i.e. Operational checking of the Stereo & Digital Programme Input-Cum-Monitoring Rack and measurements are carried out well in advance and these measurement details, graphical printouts and figures must be available, at the time of inspection. These must also be submitted to All India Radio along with the call for inspection of the Stereo & Digital Programme Input-Cum-Monitoring Rack well in advance for analyzing etc.

SECTION 4.0 (A)**I. SCHEDULE OF MATERIAL/ REQUIREMENT (UNPRICED) FOR SUPPLY OF STEREO & DIGITAL PROGRAMME INPUT CUM MONITORING RACK**

S. No.	Description	Make & Model	Unit	Qty.
1.1	Stereo & Digital Programme Input-Cum-Monitoring Rack broadly comprising of following equipment and items and as per AIR Specification		Set complete System	1 Set Complete System
(i)	Stereo programme input selector switch (Solid State based)-1 No.			
(ii)	Digital programme input selector switch (Solid State based)-1 No.			
(iii)	Stereo & Digital metering selector(Solid State based) with D/A convertor for Digital Input-1 Set			
(iv)	Stereo & Digital monitoring selector(Solid State based) with D/A convertor for Digital Input-1 Set			
(v)	Level display unit/bar graph-1 No.			
(vi)	Stereo & Digital Monitoring amplifier-(1 Set) (1+1)			
(vii)	High quality stereo speaker-1 set			
(viii)	Stereo AF Jack panels of 20 Jacks each-(2 Sets)			
(ix)	Digital AF Jack panels of 20 Jacks each -(2 Sets)			
(x)	RF Patch panel-1 No			
(xi)	Stereo AF patch cords-(4 sets) 3' & 6' (2 each)			
(xii)	Digital Stereo AF patch cords-(4 Sets) 3' & 6' (2 each)			
(xiii)	Stereo Distribution Amplifier-1 No.			
(xiv)	Digital Distribution Amplifier-1 No.			
(xv)	Studio Head Phones- 4 Sets			
(xvi)	Power supply cables, audio cables and connectors for each individual equipment and one spare cord-1 Lot			

(Manzoor Ali, AE)

(P.K.Sharma, AE)

(Aditya Chaturvedi, DE)

(S.Hyder, DE)

Specification No: PI Rack/20/June/2016-D(TD/FM)

1.2	Technical Manuals (for Installation, Testing, Commissioning, Operation & Maintenance, including theory of operation and fault diagnosis) COLOUR printed and duly bound for Stereo & Digital Programme Input-Cum-Monitoring Rack along with soft copy on CD shall be supplied as per distribution given below:			
	(i). For Zonal Office (Project Wing) { Within one month of issue of Acceptance of Tender} (irrespective of number of Stereo & Digital Programme Input-Cum-Monitoring Rack to be ordered)		Set	1 Set
	(ii). For Consignee { To be supplied along with the equipment}		Set	2 Sets
1.3	Inspection charges of Stereo & Digital Programme Input-Cum-Monitoring Rack as per AIR specifications		Lot	1 Lot

SECTION 4.0 (B)SPARES (OPTIONAL)**2. SCHEDULE OF MATERIAL/REQUIREMENT FOR SUPPLY (ESSENTIAL AND RECOMMENDED SPARES) (Unpriced) (For one Set of Stereo & Digital Programme Input-Cum-Monitoring Rack)**

S. No.	Description	Make & Model	Unit	Qty
2.1	Cooling fans complete		No	1 No
2.2	DC SUPPLY: In case any of the Rack equipment is to operate on a separate DC Supply, one such unit is to be offered as spare and price are to be quoted separately.		No	1 No
2.3	Any other item as per recommendation of manufacture.		Lot	1 Lot

All India Radio at its own discretion may procure essential spares for a value not exceeding 10% of the cost of equipments. All the tenderer should quote all the essential spares.


(Manzoor Ali, AE)

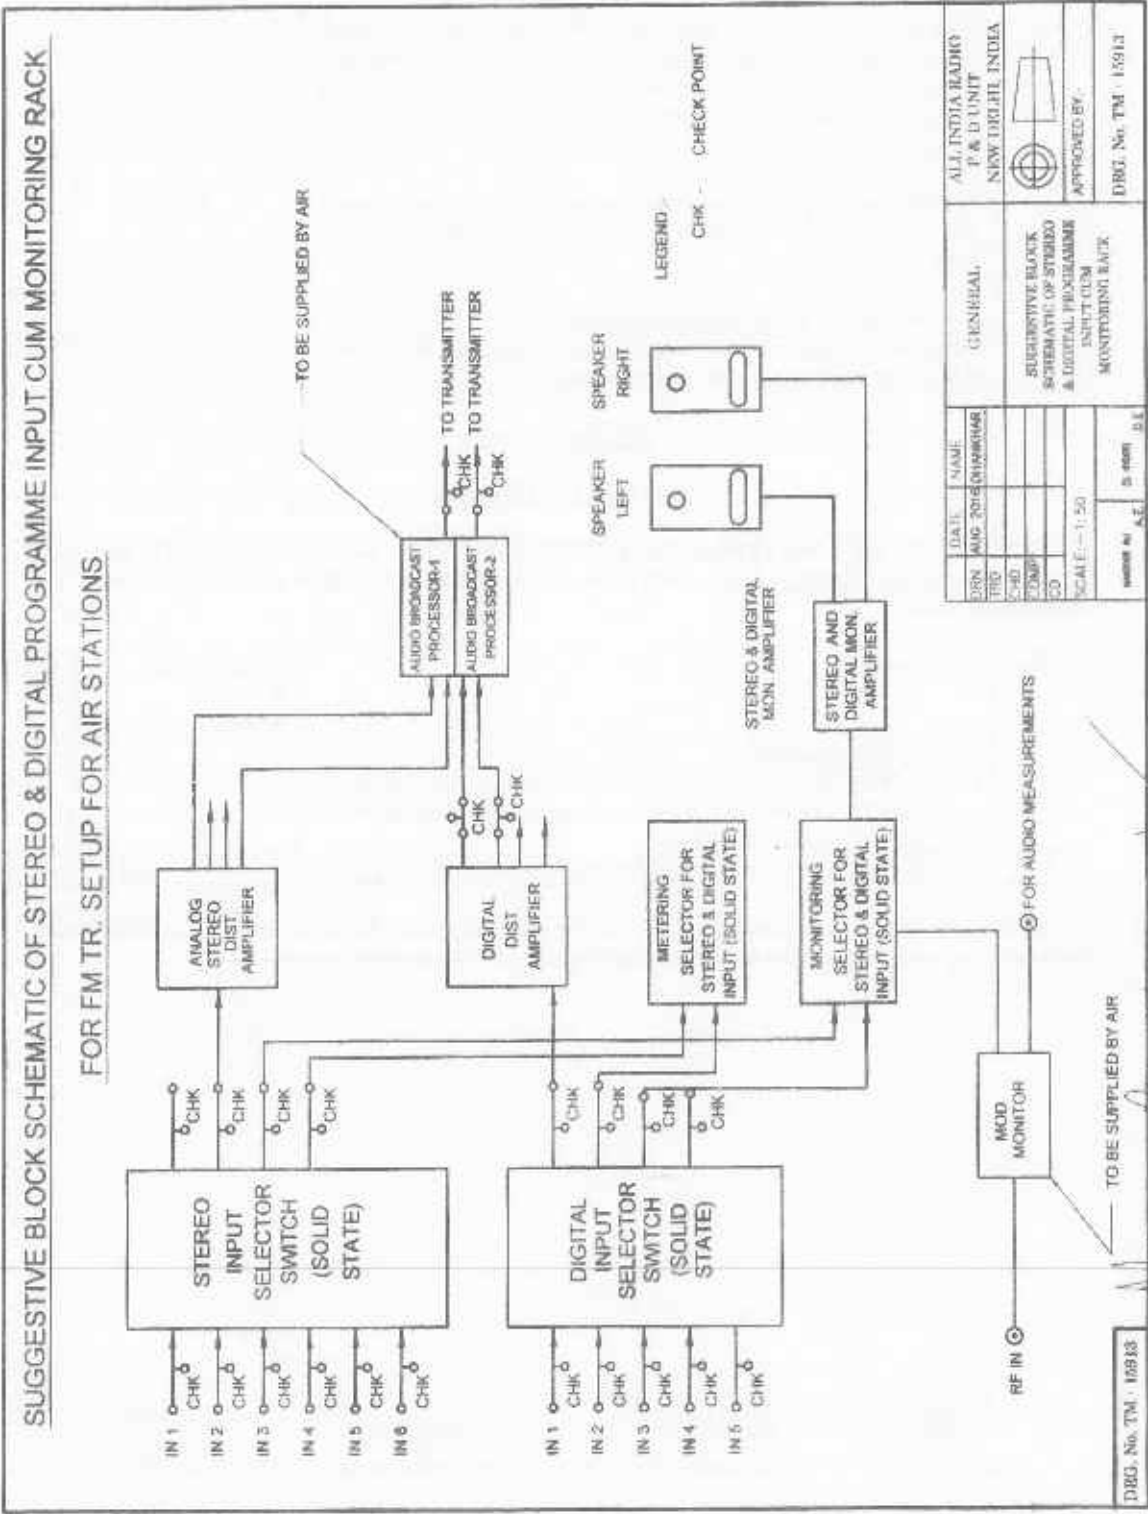

(P.K.Sharma, AE)


(Aditya Chaturvedi, DE)


(S.Hyder, DE)

117/49/59

1095558/2023/Tx Design Division - P&D Unit



Annexure

State wise and District wise details for Supply of Stereo & Digital Programme Input-Cum-Monitoring Rack at 52 Nos. of Stations.

A. 41 FM Transmitter approved on 18.01.2023

Sr. No.	Location	District	Status/ UT Name	FM Setup proposed	Cost (Rs. In cr.)
1.	Nandyal	Kurnool	Andhra Pradesh	5 KW	
2.	Chintapalle	Visakhapatnam	Andhra Pradesh	5 KW	
3.	Vizianagaram	Vizianagaram	Andhra Pradesh	5 KW	
4.	Darbhanga	Darbhanga	Bihar	5 KW	
5.	Katihar	Katihar	Bihar	5 KW	
6.	Saharsa	Saharsa	Bihar	5 KW	
7.	Gopalganj	Gopalganj	Bihar	1KW	
8.	Jagdalpur	Bastar	Chhatisgarh	10KW	
9.	Kondagaon	Kondagaon	Chhatisgarh	1 KW	
10.	Narayanpur	Narayanpur	Chhatisgarh	5 KW	
11.	Bailadila	Dakshin Bastar Dantewada	Chhatisgarh	5 KW	
12.	Kanker	Uttar Bastar Kanker	Chhatisgarh	5 KW	
13.	Devbhumi Dwarka	Devbhumi Dwarka	Gujarat	10 KW	
14.	Bhuj	Kachchh	Gujarat	20 KW	
15.	Radhanpur	Patan	Gujarat	10 KW	
16.	Bhavnagar	Bhavnagar	Gujarat	5 KW	
17.	Chura	Chamba	Himachal Pradesh	1 KW	
18.	Sarkaghat	Mandi	Himachal Pradesh	5KW	
19.	Pakur	Pakur	Jharkhand	5 KW	
20.	Simdega	Simdega	Jharkhand	5 KW	
21.	Giridih	Giridih	Jharkhand	5 KW	
22.	Kodarma	Kodarma	Jharkhand	5 KW	
23.	Shimoga	Shimoga	Karnataka	10 KW	
24.	Udupi	Udupi	Karnataka	1 KW	
25.	Leh	Leh (Ladakh)	Ladakh	5 KW	
26.	Singrauli	Singrauli	Madhya Pradesh	1 KW	
27.	Ambajogal	Bid	Maharashtra	10 KW	
28.	Baleshwar	Baleshwar	Odisha	5 KW	
29.	Jaisalmer	Jaisalmer	Rajasthan	20KW	
30.	Sikar	Sikar	Rajasthan	1 KW	
31.	Anupgarh	Ganganagar	Rajasthan	1 KW	
32.	Kumbakonam	Thanjavur	Tamil Nadu	10 KW	
33.	Vellore	Vellore	Tamil Nadu	5 KW	
34.	Salem (Yercaud)	Salem	Tamil Nadu	5 KW	
35.	Farrukhabad	Farrukhabad	Uttar Pradesh	5 KW	
36.	Basti	Basti	Uttar Pradesh	5 KW	
37.	Etah	Etah	Uttar Pradesh	5 KW	
38.	Hardoi	Hardoi	Uttar Pradesh	5 KW	
39.	Nainital	Nainital	Uttarakhand	1 KW	
40.	Pithoragarh	Pithoragarh	Uttarakhand	1 KW	
41.	Munasyari	Pithoragarh	Uttarakhand	5 KW	

1212621/2024/Purchase Section - Zonal Office(NZ)

	approved on 21.10.2023				
1.	Tonk	Tonk	Rajasthan	1 KW (DD LPT Site)	
2.	Bonaigarh	Sudergarh	Odisha	1 KW (DD LPT Site)	
3.	Vallabhnagar	Udaipur	Rajasthan	1 KW (DD LPT Site)	
4.	Kalimpong	Darjeeling	West Bengal	1 KW (DD LPT Site)	
5.	Motihari	East Champaran	Bihar	1 KW (DD LPT Site)	
6.	Dharampur	Solan	Himachal Pradesh	1 KW	
7.	Morbi	Morbi	Gujarat	5 KW	
C:	4 FM Transmitters				
1.	Rampur	Rampur	Uttar Pradesh	10 KW	
2.	Jaspur	Udham Singh Nagar	Uttarakhand	10 KW	
3.	Kupwara	Kupwara	Jammu & Kashmir	10 KW	
4.	Gurej	Bandipore District	Jammu & Kashmir	10 KW	

BILL OF MATERIAL**Supply of Stereo & Digital Programme Input cum Monitoring Rack at 52 Nos. of Stations**

S.No.	Description	Make & Model	Qty.	Rate per set	Amount	GST	Total Amount
1.1	Stereo & Digital Programme Input-Cum-Monitoring Rack broadly comprising of following equipment and items and as per AIR Specification						
(i)	Stereo programme input selector switch (Solid State based)-1 No.		52 Set				
(ii)	Digital programme input selector switch (Solid State based)-1 No.						
(iii)	Stereo & Digital metering selector (Solid State based) with D/A convertor for Digital Input -1 Set						
(iv)	Stereo & Digital monitoring selector (Solid State based) with D/A convertor for Digital Input -1 Set						
(v)	Level display unit/bar graph-1 No.						
(vi)	Stereo & Digital Monitoring amplifier -(1 Set) (1+1)						
(vii)	High quality stereo speaker -1 Set						
(viii)	Stereo AF Jack panels of 20 Jacks each -(2 Sets)						
(ix)	Digital AF Jack panels of 20 Jacks each -(2 Sets)						
(x)	RF Patch panel -1 No.						
(xi)	Stereo AF patch cords-(4 sets) 3' & 6' (2 each)						
(xii)	Digital Stereo AF patch cords -(4 Sets) 3' & 6' (2 each)						
(xiii)	Stereo Distribution Amplifier -1 No.						
(xiv)	Digital Distribution Amplifier -1 No.						
(xv)	Studio Head Phones- 4 Sets						
(xvi)	Power supply cables, audio cables and connectors for each individual equipment and one spare cords-1 Lot						

Specification No: PI Rack/20/June/2016-D(TD/FM)

1.2	Technical Manuals (for Installation, Testing, Commissioning, Operation & Maintenance, including theory of operation and fault diagnosis) COLOUR printed and duly bound for Stereo & Digital Programme Input-Cum-Monitoring Rack along with soft copy on CD shall be supplied as per distribution given below:					
	(i). For Zonal Officer (Project Wing) { With one month of issue of Acceptance of Tender} (irrespective of number of Stereo & Digital Programme Input-Cum-Monitoring Rack to be ordered)					
	(ii). For Consignee {To be supplied along with the equipment}					
1.3	Inspection charges of Stereo & Digital Programme Input-Cum-Monitoring Rack as per AIR specifications					

SECTION 4.0 (B)

SPARES [OPTIONAL]

2. SCHEDULE OF MATERIAL/REQUIREMENT FOR SUPPLY (ESSENTIAL AND RECOMMENDED SPARES) (Un-priced) (For one Set & Digital Programme Input-Cum-Monitoring Rack)

S. No.	Description	Make & Model	Qty.	Rate per set	Amount	GST	Total Amount
2.1	Cooling fans complete						
2.2	DC SUPPLY: In case any of the Rack equipment is to operate on a separate DC Supply, one such unit is to be offered as spare and price are to be quoted separately.		52 Set				
2.3	Any other item as per recommendation of manufacture.						

Note:

- 1.The rates quoted for optional items not to be considered for deciding L1.
2. All India Radio at its own discretion may procure essential spares for a value not exceeding 10% of the cost of equipments. All the tenderer should quote all the essential spares.
3. The list of stations attached as annexure.
4. Material delivered at concerned stations.