

1225767/2024/Proj ADG(E)-(WZ) PROJ



PRASAR BHARATI  
(INDIA'S PUBLIC SERVICE BROADCASTER)  
O/o ADDITIONAL DIRECTOR GENERAL (E) (WZ)  
ALL INDIA RADIO & DOORDARSHAN  
P.B. ROAD, WORLI, MUMBAI-30.



NO.ADG (E)(WZ)/AIR-P/Misc. Dept. Works/ Bhuj/ 2024-25

Dated. 26/04/2024

**Subject:** - Invitation of Budgetary Quote for the Misc. Departmental works in transmitter hall at Akashvani Bhuj (Gujarat) as per listed in the Budgetary Quote Form.

1. The budgetary quote form of the upcoming tender is enclosed herewith to offer comments, (if any) by prospective bidders/firms with budgetary quote.
2. Bidders/firms may please submit the above detail/ their quote on or before due date by e-mail to [sgvaidya@prasarbharati.gov.in](mailto:sgvaidya@prasarbharati.gov.in) and [mohanmahadeomose@prasarbharati.gov.in](mailto:mohanmahadeomose@prasarbharati.gov.in) or at following address.

**Sh. Suhas Vaidya**

Assistant Engineer

O/o Additional Director General (E-WZ)

Akashvani & Doordarshan, 2<sup>nd</sup> floor, A.O.A building,

Doordarshan Complex, Worli, Mumbai – 400030

Mobile No.: 9423781165

e-mail id: [sgvaidya@prasarbharati.gov.in](mailto:sgvaidya@prasarbharati.gov.in) ,  
[mohanmahadeomose@prasarbharati.gov.in](mailto:mohanmahadeomose@prasarbharati.gov.in)

Due Date to offer Comments: 07-05-2024

**Enclosed:**

1. Budgetary Quotation form of the upcoming tender is enclosed herewith.

(Suhas Vaidya)  
Assistant Engineer  
For Add. Director General (E ),WZ  
MUMBAI

1225767/2024/Proj ADG(E)-(WZ) PROJ



PRASAR BHARATI  
(INDIA'S PUBLIC SERVICE BROADCASTER)  
O/o ADDITIONAL DIRECTOR GENERAL (E) (WZ)  
ALL INDIA RADIO & DOORDARSHAN  
P.B. ROAD, WORLI, MUMBAI-30.



NO.ADG (E)(WZ)/AIR-P/Misc. Dept. Works/ Bhuj/ 2024-25

Dated. 26/04/2024

### **Budgetary Quotation Form**

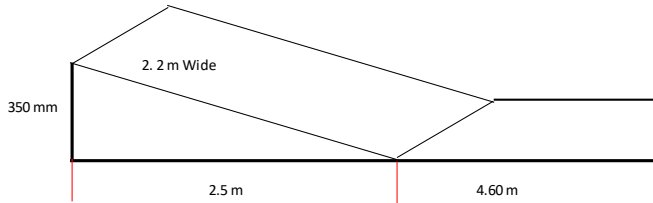
**Subject:** - Invitation of Budgetary Quote for the Misc. Departmental works in transmitter hall at Akashwani Bhuj (Gujarat) as per listed in the Budgetary Quote Form.

**Last date of receipt of budgetary quotation in this office: 07-05-2024 up to 12:00Hrs.**

Please read carefully the terms and conditions given the enquiry quotation form.

S.N o.	DESCRIPTION	Qty	Rates	Amount
1.	<b>PAINTING</b> : Painting walls of Transmitter Room, Service Room, UPS room, Blower Room, LT Panel Room, AVR Room and CCW LT panel room with approved shade and approved colour, good quality, branded manufacturer, plastic emulsion / Royal paint after scrubbing old paints totally from the walls, applying Birla white putty for levelling of the walls, applying 2 coats of primer and applying 2 coats of washable plastic emulsion / Royal paints on the walls for smooth finish.	350 sq. Mtrs.		
2.	<b>GLASS PARTITION</b> : Fabrication, Erection & Fixing of 5 mm., thick, Clear Glass Partitions up to false ceiling on heavy duty, 18 guage, Color Anodized, Aluminum frame work having "L" section with One no. of single leaf Door and One no of two leaf door of size 900 x 1500 mm. and Novapan/ Laminated ply wood sheet of size 500 x 900 mm on top and bottom of door with 500 mm x 900 mm clear glass of 5 mm thick on framework of approved shade, Anodized, Aluminum sections of appropriate size with all accessories, fittings, connectors, door handles, door closures, locking arrangements, etc. required as per site conditions. The clear glass doors along with partition is to be provided in Transmitter Hall. Drawing will be provided in the tender document.	47 sq. Mtrs.		
3.	<b>FALSE CEILING</b> : Fabrication, Supply & erection of false ceiling. Making frame by using aluminium T section of 25 x 35mm x 3 mm thick as main runner and L section of 25 x 35mm x 3 mm as cross section for fixing 600 x 600 x 12mm (thick) Gypsum semi perforated board. Supply and fixing of 600 x 600 x 12mm Gypsum semi perforated board of Ivory shade. The ceiling frame is to be properly anchored on ceiling by using 12/14 SWG GI wire.	95 sq. Mtrs.		

1225767/2024/Proj ADG(E)-(WZ) PROJ

4.	<b>Replacement of Existing Aluminium doors and windows :</b> <ol style="list-style-type: none"> <li>2 – leaf door (Back side of Transmitter hall) 2000 mm x 2500 mm</li> <li>Single leaf Door of size 1000 mm x 2500 m – 4 nos. ( Service room, UPS room, Entrance of TR Hall, Blower Room)</li> <li>Replacement of Window - 1.2 m x 1.2 m – 2 nos.( LT Panel Room and DG Room)</li> </ol>	16.5 Sq. Mtrs.		
5.	<b>Water Proofing at terraces:</b> Cleaning properly the existing surface of terrace with wire brush, washing the same with running water, filling the gap with cement concrete 1:1.5:3, and providing and applying two coats of Master seal 550 EL, of BASF make or approved equivalent complete all as required and as directed at site.	60 sq. Mtrs.		
6	<b>Making of Ramp (Outside of TR Hall)</b>  <p>RCC Ramp for Loading and unloading the heavy material / equipments in to the transmitter hall at the back entry of transmitter hall.</p>	1 No of Given Size		
7	M.S. ANGLE Ladder for use of Terrace (1st Level ) 2.5 X 12 Feet. The Ladder is to be fixed with Concrete and heavy duty nails / Fasteners / Welding at ground and terrace side.	1 No		
8	M.S. ANGLE Ladder for use of Transmitter Hall Terrace from 1st Level. 2.5 X 7 Feet. The Ladder is to be fixed with Concrete and heavy-duty nails / Fasteners / Welding	1 No		
	<b>Total</b>			
	<b>GST @</b>			
	<b>Grand Total</b>			

**Note:**

1. Consignee: Installation officer, Akashvani , HPT DD site Bhuj (Gujarat)
2. Time of execution as per permission of engineer in charge at Akashvani HPT DD site Bhuj (Gujarat)
3. The bidder must be experienced in same kind of scope.
4. Specifications of the item to be procured is attached with this form, filling the budgetary quote specifications should be considered extensively.
5. Supply has to be done as per the terms and conditions in upcoming tender documents.
6. Quantity of Material & Scope may increase or decrease as per actual requirement/constraints at site.
7. Validity: 120days
8. Declaration: We declare that all the conditions as given in the quotation form have been read by us.

Name (in capital) \_\_\_\_\_  
(Seal & Signature of the Bidder)