



प्रसार भारती
Prasar Bharati
भारत का लोक सेवा प्रसारक
India's Public Service Broadcaster
कार्यालय: अपर महानिदेशक (अभि.) (उत्तरी क्षेत्र)
Office of the Additional Director General (E) (NZ)
आकाशवाणी एवं दूरदर्शन
Akashvani & Doordarshan
आठवां तल, सूचना भवन, सी.जी.ओ. कॉम्प्लेक्स, नई दिल्ली 110003
8th floor, Soochna Bhawan, CGO Complex, New Delhi-110003



सत्यमेव जयते

AIR-Co/Udaipur/2V/3/2025-26/Instt./(False Ceiling)

Dated: 02.05.2025

Subject: Extension of inviting budgetary quotation for providing, fabrication & fixing of acoustic treated false ceiling in Control Room, Dubbing Room including dismantling of material & GI frame structure false ceiling in AC Plant Room including dismantling of material at Akashvani Udaipur (Rajasthan).

1. The budgetary quotation & drawings of the upcoming bid is enclosed herewith to offer comments, if any by prospective bidders/firms.
2. Bidders/firms are requested to provide information about content in respect of scope along with budgetary quote.
3. Bidders/firms may please submit the above detail on or before due date by e-mail to rksrivastav@prasarbharati.gov.in or at following address.


R.K Srivastav
Assistant Director (Engg.)
Room No. 899-C,
O/o ADG (E)(NZ)
Akashvani & Doordarshan,
8th floor, CGO Complex,
Soochna Bhawan, New Delhi-110003
Mobile No.: 9873364977
e-mail id: rksrivastav@prasarbharati.gov.in

Budgetary Quotation for: Extension of inviting budgetary quotation for providing, fabrication & fixing of acoustic treated false ceiling in Control Room, Dubbing Room including dismantling of material & GI frame structure false ceiling in AC Plant Room including dismantling of material at Akashvani Udaipur (Rajasthan).

Due Date to offer Comments: 07.05.2025

Enclosed:

1. Budgetary Quotation form & drawings of the upcoming bid is enclosed herewith to offer comments, if any by prospective bidders/firms.


**Assistant Director (Engg.)
For Add. Director General (NZ)**

(Faint handwritten text at the bottom right)



AIR-Co/Udaipur/2V/3/2025-26/Instt./(False Ceiling)

Date: 02.05.2025

Budgetary Quotation Form

Project: Refurbishing of studios under the component face-lift of DD/AIR Channels under project mode at Akashvani Udaipur (Rajasthan).
Subject: Providing, fabrication & fixing of acoustic treated false ceiling in Control Room, Dubbing Room including dismantling of material & GI frame structure false ceiling in AC Plant Room including dismantling of material at Akashvani Udaipur (Rajasthan).

Last date of receipt of budgetary quotation in this office: 07.05.2025 upto 12:00Hrs.

Please read carefully the terms and conditions given the enquiry quotation form.

S.No.	Description	Qty	Rates	Amount
1.	Dismantling of old worn out acoustic treated false ceiling facing material of Control Room, Dubbing Room at Akashvani Udaipur (Rajasthan), shifting & disposal of dismantled debris material from the outside of the office premises.	56 Sq.mtr		
2.	Providing, fabrication and fixing of acoustic treatment false ceiling facing material in Control Room, Dubbing Room at Akashvani Udaipur (Rajasthan) as per drawing SG=10150 and 10178/4. Description of scope as per measurement taken at site: <ul style="list-style-type: none">a) Providing, fabrication and fixing of 12mm thick plain insulation board as per drawing.b) Providing, fabrication and fixing of absorbing acoustic material glass wool pads covered with tissue paper inside the wood frame as per drawing.c) Providing, fabrication and fixing of 12.5mm thick acoustic facing material fully perforated gypsum tiles (600mm x 600mm) as per drawing.d) Providing, fabrication and fixing of 2"x2" wooden cedar/teak wood cover beading at all the corners, joints and edges as per site.e) Providing of 600mm x 600mm hinged flap flushed doors and fixing it on the ceiling in Control Room, Dubbing Room at Akashvani Udaipur (Rajasthan)	56 Sq.mtr		
3.	Dismantling of old worn out false ceiling in AC Plant Room at Akashvani Udaipur (Rajasthan), shifting & disposal of dismantled debris material from the outside of the office premises.	29 Sq.mtr		
4.	Providing, fabrication and fixing of false ceiling in AC Plant Room at Akashvani Udaipur (Rajasthan) as per drawing SG-10150, 10178/4 and respective drawings. Description of scope as per measurement taken at site: <ul style="list-style-type: none">Providing, fabrication and fixing of frame structure with GI metal sheet channel. For hanging arrangement wall to wall 40mm x 40mm x 2mm MS slotted angles with strap hangers shall be provide as per site requirements to support the GI frame structure. These slotted angles shall be further supported 8mm MS tie rods and 10mm MS fasteners from the real ceiling to make the entire structure in level and intact. (as per drawing).Providing, fabricating and fixing of 12mm thick facing material ISI make plain bison board as per drawing.Providing of 600mm x 600mm hinged flap flushed doors and fixing it on the ceiling in AC Plant Room at Akashvani Udaipur (Rajasthan)	29 Sq. mtr.		
5.	Fixing of 2ft x 2ft recessed mounted LED light fixtures, space shall be provided in ceiling equal to the size of light fixtures as per respective layout drawings with supply of 1.5 Sq. mm multistrand single core copper cable 05 Rolls (100mtr each) with complete laying & wiring from electrical board to 2ft x 2ft recessed mounted LED light fixtures and make them ready to use in technical area in Studios at Akashvani Udaipur (Rajasthan).	20 Nos.		
	Important Note:- (Must read carefully) <ul style="list-style-type: none">Drawings are provided for guidance of bidder.Akashvani Udaipur is a running station of Akashvani and studios and other Technical rooms are available only during non working hours of station which may be in night time also. There will be limited working hours based on availability of concern studios.Working hours shall be decided by engineering head.All above shall be carried out and completed strictly as per respective drawings.Minor materials like screw of various sizes nails of appropriate size, all adhesives as per requirements of standard quality has to be provide by the tenderer.Hardware material such as fasteners, hanging rods, gypsum screws, steel screws, nails, slotted angle, fevicol, tissue paper, etc. Required for completion of above is to be provided/supplied by the bidder.All required wooden material should be water proof & termite proof and should be of reputed brand.As the required scope is to be carried out in the running station the all job are required to be done in coordination with the station authorities. Total working hours per day shall be decided on the availability of the studios.The bidder must be experienced in same kind of scope & shall submit documentary.Above complete scope will be carried out in presence of authorized representative of this office.			
	Total			
	GST@			
	Grand Total			

Note:

- Scope of the order shall be as defined in the order, specifications, drawings and Appendices there to.
- Completeness of the equipment shall be the responsibility of the supplier/contractor. Any equipment, fittings and accessories, which may not be specifically mentioned in the specification or drawing(s) but which are usual or necessary for the satisfactory functioning of the equipment (successful operation and functioning of the equipment being supplier's/contractor's responsibility) shall be provided by the supplier/contractor without any extra cost.
- The supplier/contractor shall follow the best modern practice in the manufacture of high grade equipment not-withstanding any omission in that, the supplier/contractor shall in all respect design, engineer, manufacture, and supply the same within delivery period to the entire satisfaction of the organization.
- The scope of current bid/tender is providing, fabrication, fixing of acoustic treated false ceiling in Control Room, Dubbing Room & AC Plant Room including dismantling of material of existing area as per BOQ at Akashvani Udaipur (Rajasthan).
- Details standard drawings have been provided with tender for guidance of bidder. Tenderer shall require visiting the site for understanding the clear requirement of scope before submitting the offer.
- The design life of product offered for various acoustic treated wall paneling including wainscot and acoustic treated false ceiling should be 25 years.
- Detailed BOQ and material specifications shall be submitted along with make, model (if applicable) of all the materials including technical leaflets of OEM as per the offered design. The NRC value of all applicable products shall be mentioned.
- Detailed specifications shall be submitted as per scope.
- Experience details of similar scope executed during last seven years shall be submitted as per general terms and condition.
- Time of execution as per permission of engineer incharge at Akashvani Udaipur (Rajasthan).

- The bidder must be experienced in same kind of scope & shall submit documentary evidence with offer. The completion certificate is also to be attached issued by any Central and State Government agency, PSUs, Private organizations.
(In case of SITC/SETC and specialized scope, the contractor should also have sufficient experience and shall submit the experience certificate of satisfactory completion of at least three similar works, each of value not less than 40% of the estimated cost put to tender or two similar works, each of value not less than 60% of the estimated cost or one similar work of value not less than 80% of the estimated cost, all amounts rounded off to a convenient full figure, in the last 7 years ending on the last day of the month previous to the one in which the tenders are invited”).
- Execution of scope has to be completed without break in service at Akashvani Udaipur (Rajasthan).
- Before submitting the offer tenderer must visit site and with prior permission of the site in-charge and submit confirmation of site visit. Technical details will be provided by In-charge of Site/I.O.
- The firm has to produce a list all such labour along with the address proof which are to be employed office on signing contract. The firm shall issue the identity cards to all such persons to facilitate the entry in at Akashvani Udaipur (Rajasthan).
- Inspection will be carried out preferably in presence of authorized representative of O/o ADG (NZ), AIR & DD, 8th floor, Soochna Bhawan, CGO Complex, New Delhi-110003.
- Any damage or misplace in equipment will have to be provided by the firm during execution.

- 1) Quantity of Material & Scope may increase or decrease as per actual requirement/constraints at site.
- 2) Please read carefully the terms and conditions given in this quotation form.
 - a) GST No: b) PAN No.....
- 3) **Delivery at:** Refurbishing of studios at Akashvani Udaipur (Rajasthan).
- 4) **Consignee:** Installation officer, Akashvani Udaipur (Rajasthan).
- 5) **Completion Period:** Execution/Completion of scope within 90days from the date of order.
- 6) **Validity:** 120days
- 7) **Payment terms:**
 - 97% Payment on completion/execution of scope in good condition at site.
 - Balance payment of 03% will be paid after guarantee/warranty period of one year. However payment can be released against FDR/Account Payee Demand Draft/Banker’s Cheque of equivalent amount in favour of Chief Engineer (NZ), AIR & DD, New Delhi valid for guarantee period at least.
- 8) **Performance Security:**
 - The firm/supplier/contractor should submit performance security deposit in the form of FDR from a schedule commercial bank valid for one year in favour of Chief Engineer (NZ), AIR & DD, New Delhi.
 - The performance security deposit shall be 03% of cost of the order/contract value.
 - For release of security deposit/performance security, the firm will submit his claim along with a certificate from the ultimate consignee that equipment supplied/SITC executed against this order has performed satisfactorily during its warranty/guarantee period and department have not suffered any loss/inconvenience on this account.
- 9) **Declaration:** We declare that all the conditions as given in the quotation form have been read by us.

Name (in capital) _____
(Seal & Signature of the Bidder)






DESCRIPTION OF ABSORBING AND FACING MATERIALS

ABSORBING MATERIAL (TABLE 1)

Material	Weight	Volume	Notes
Concrete	100 lbs	1 cu ft	Standard weight
Brick	50 lbs	1 cu ft	Standard weight
Block	20 lbs	1 cu ft	Standard weight
Gravel	100 lbs	1 cu ft	Standard weight
Sand	100 lbs	1 cu ft	Standard weight


ACING MATERIAL (TABLE 2)

Material	Weight	Volume	Notes
Concrete	100 lbs	1 cu ft	Standard weight
Brick	50 lbs	1 cu ft	Standard weight
Block	20 lbs	1 cu ft	Standard weight
Gravel	100 lbs	1 cu ft	Standard weight
Sand	100 lbs	1 cu ft	Standard weight

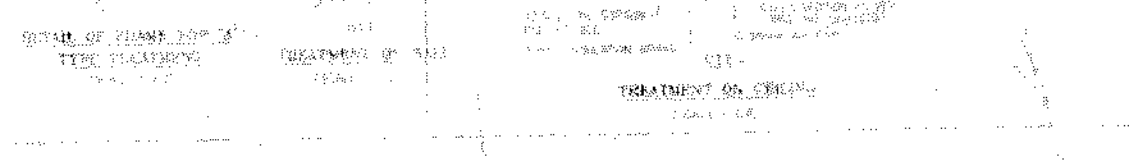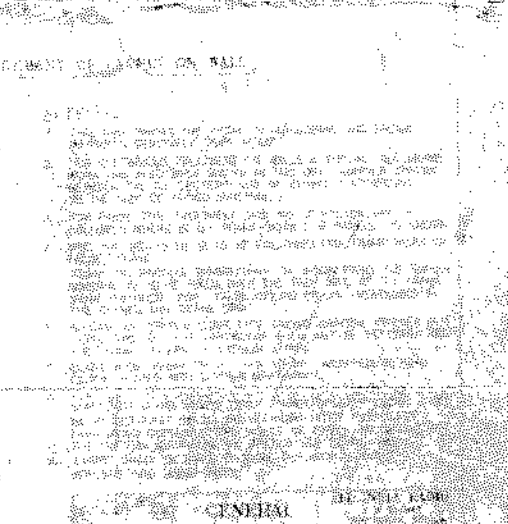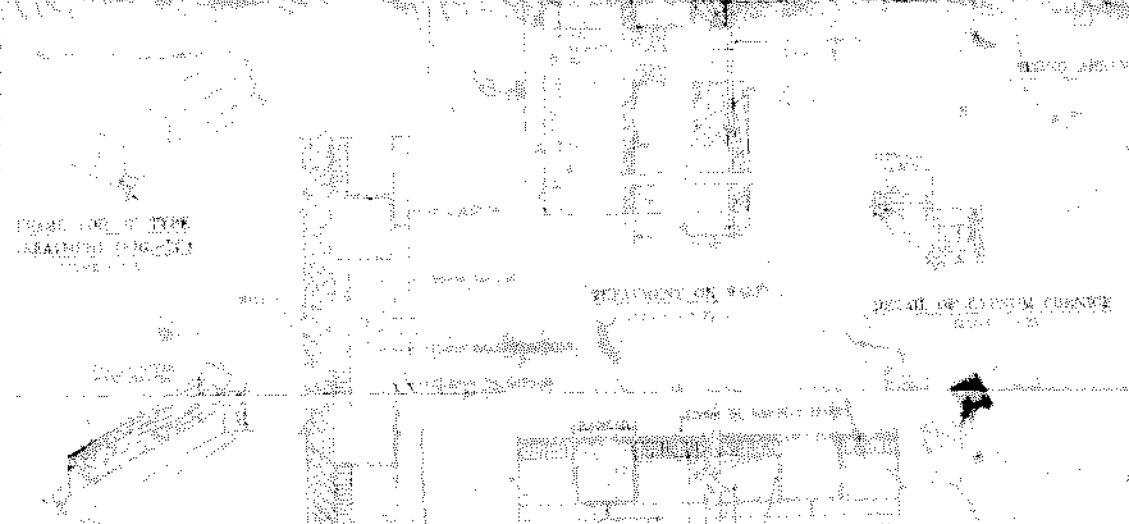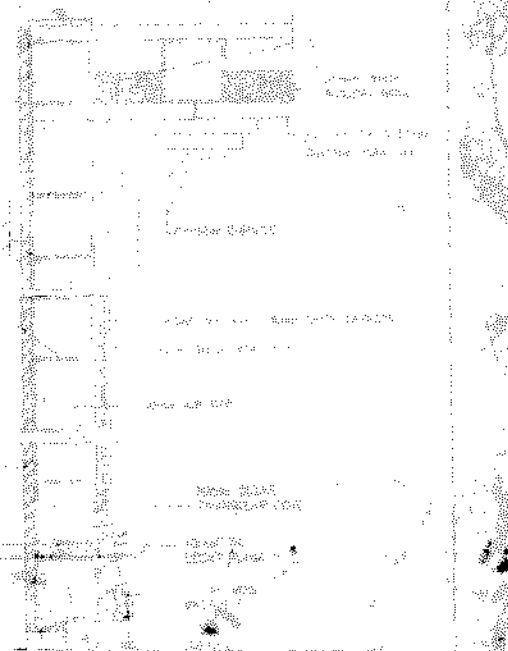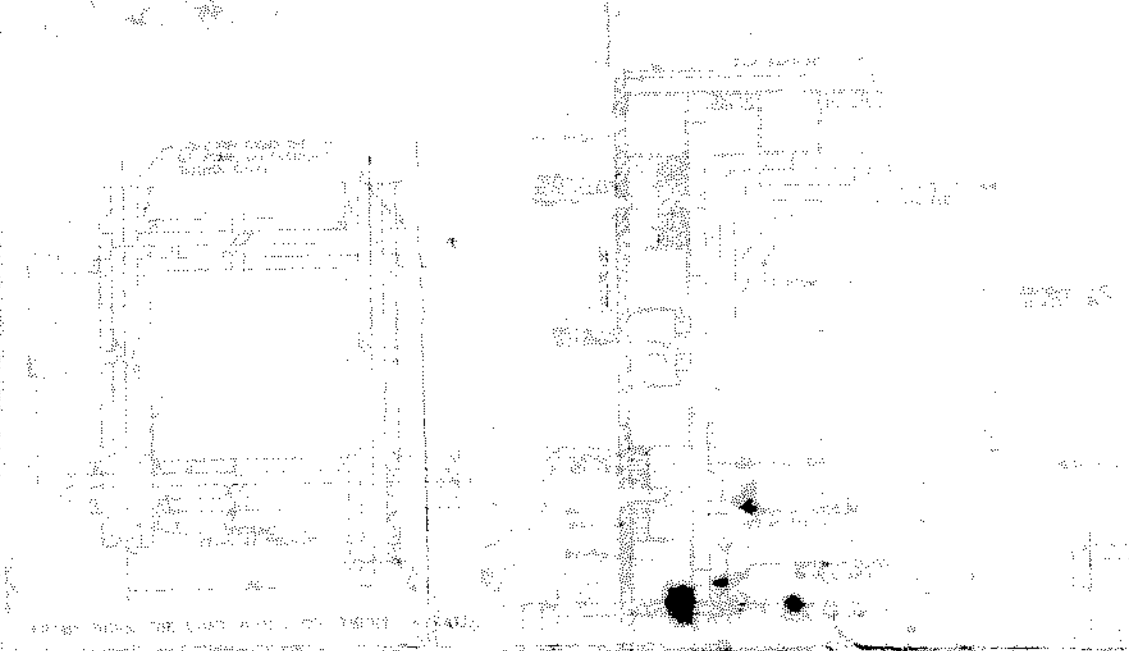

STANDARD WEIGHT STANDS FOR ABSORBING MATERIAL
STANDARD WEIGHT STANDS FOR FACING MATERIAL

CONSTRUCTION DETAIL OF METALLIC FRAME STRUCTURE WITH FALSE CEILING




GENERAL PLAN



ELEVATION SECTION A-A



ELEVATION SECTION B-B

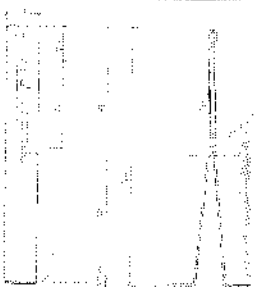

ELEVATION


ELEVATION

DETAIL OF STRAP HARDWARE
OF JOINT

SECTIONAL ELEVATION OF BEAM AND COLUMN JOINT



ELEVATION SECTION C-C



ELEVATION SECTION D-D

ELEVATION SECTION E-E

ELEVATION SECTION F-F

NO.	DESCRIPTION	QTY
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100