

Doordarshan Kendra, Bengaluru invites quotations from OEMs/Authorised Dealers for Supply of Indoor Floor Standing Non-touch Screen Kiosk, to this office. The detailed Specifications/Technical requirements are attached herewith. The quotations may be sent to this office be email to: sgeddkbg@gmail.com or by post to:

The Deputy Director General (Engg.)
Doordarshan Kendra
J. C. Nagara
Bengaluru-560 006

The quotations may be sent to this office on or before 24.03.2026.


The quotation for the product, **Indoor Floor Standing Non-touch Screen Kiosk of size 65"**

Quantity: One no.

For any queries contact:

L. Gururajan
Assistant Director (Engg.)
9962781051

Indoor Floor Standing Non-touch Screen Kiosk

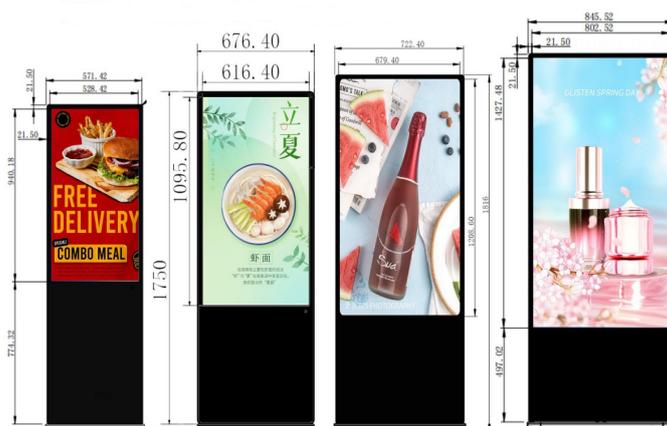

Display Size	43/50/55/65 INCH
Backlight type	LCD
Resolution	1080*1920 (HD) /4k
Brightness	450cd/m ²
Response time	7ms
Contrast	1900:2:19 0:01:00
Color gamut	60% NTSC (CIE1931)
Viewing angle	89/89/89/89 (Min.)(CR≥10)
System version	Android
Runningstorage	2G RAM
ROM	32GB
interface	WIFI、DC、USB、LAN、AUDIO、TF、Optional
CMS Software	www.signagemall.com
Touch	Infrared remote control (No touch)
Service life	>50000H

Indoor Floor Standing Non-touch Screen Kiosk

Machine parameters

Shell material (Frame/Back shell)	Aluminum alloy/Sheet metal
Accessories	<p style="text-align: center;">user manual/power cable/warranty card/allen key+base screws/Remote control</p> 

Product Features

1. The machine screen display function can customize the display of pictures, videos, text, time, weather, countdown, subtitles, split screen and other contents;
2. Auto start control, advertising programs can be automatically played on the machine;
3. Timing switch function;
4. Playback mode: support cycle, timing, insert, split screen and partition playback;
5. Split screen playback, support full screen, split screen, split screen, etc., multiple use of one screen;
6. Support U disk to automatically import and play advertising programs;
7. LCD screen: adopt brand new LCD screen; High efficiency and energy saving; Full HD 1080P screen with bright colors.
8. WiFi: The network version has a built-in high-performance SDIO interface WiFi module that supports IEEE 802.11 b/g/n;
9. Network Ethernet port: 10/100M adaptive Ethernet;
10. Network version of Android network solution: Android network motherboard, with a maximum dominant frequency of 1.6 GHz, 2GB storage, default standard 32GB EMMC NAND chip;(Windows i3 4+128/ i5 4+128....etc)
11. The network version can optionally support 4G/5G network
12. Online version of remote advertising, remote control of the switch machine, one account solution to control multiple advertising machines, one-button publishing, etc;
13. Through the infrared remote control, you can set the logo, volume, split screen, and switch on and off, saving the trouble of connecting the mouse

Supports multiple periods of time automatic switching on/off function in a day.

Support multi-languages system

Support USB Flash disk loop playback, play pictures, videos, text scrolling, pdf etc.



Support remote control from CMS software cloud server (www.signagemall.com)

Multi-scenario application: Airports, restaurants, schools, cinemas, hotels, clubs, shopping malls, stores, subways etc.

Indoor Floor Standing Non-touch Screen Kiosk


Machine parameters

Package(No include wooden case)	43inch	Packing:1840*150*690(MM)	Weight:35KGS
	50inch	Packing:1850*150*780(MM)	Weight:39KGS
	55inch	Packing:1880*150*870(MM)	Weight:50KGS
	65inch	Packing:210*15*101(MM)	Weight: 61KGS

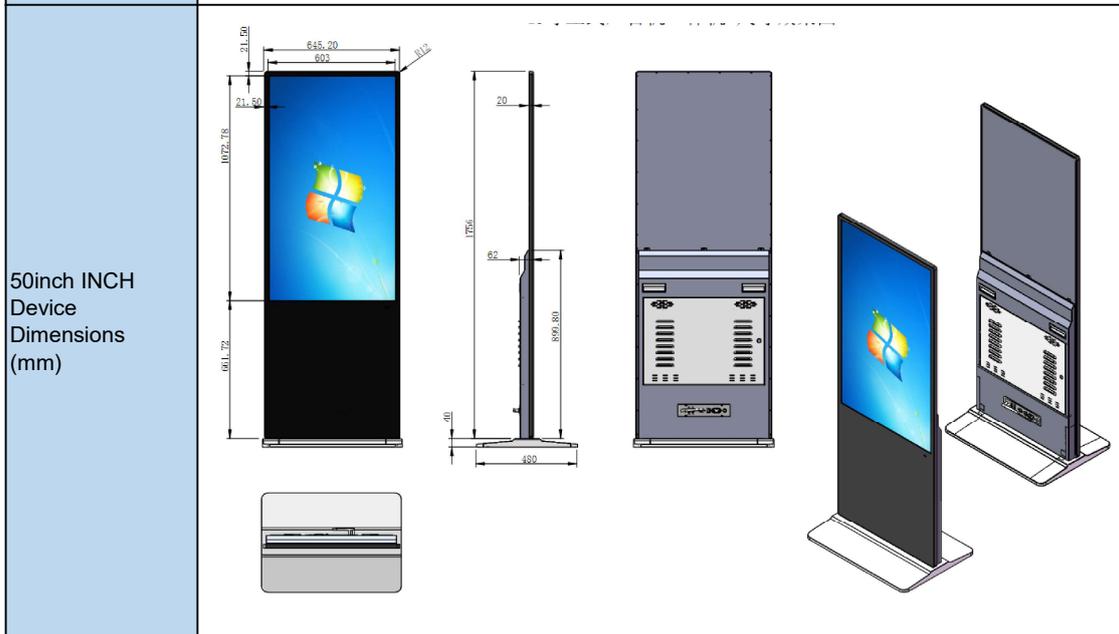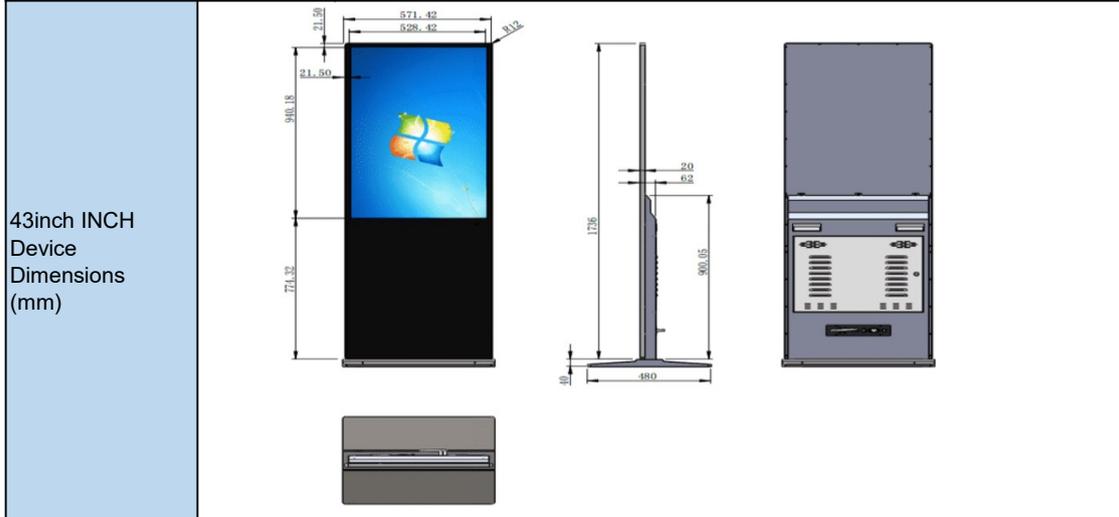


Indoor Floor Standing Non-touch Screen Kiosk

55inch INCH
Device
Dimensions
(mm)

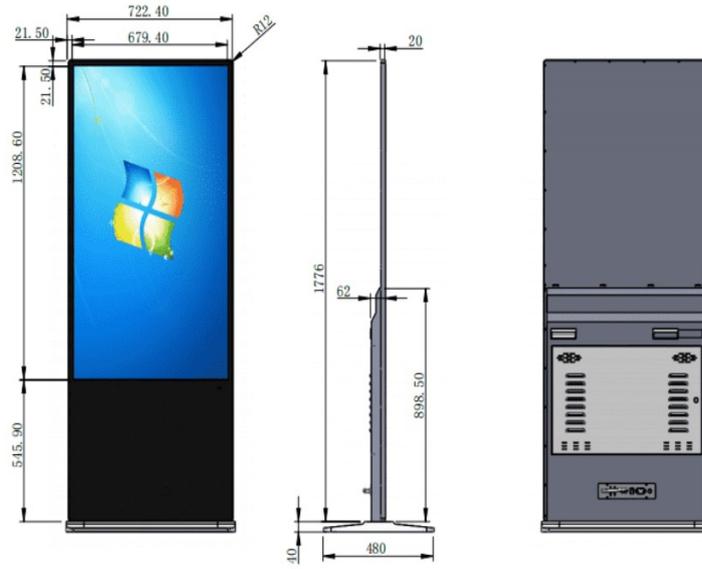

65inch INCH
Device
Dimensions
(mm)

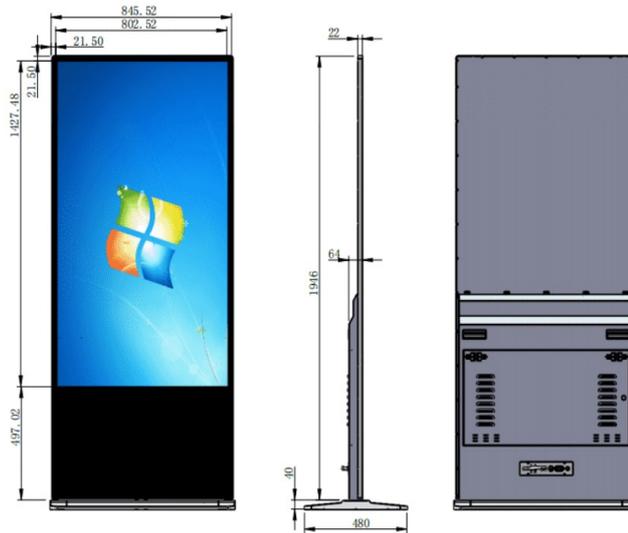

Indoor Floor Standing Non-touch Screen Kiosk

Buyer display



It can be connected and used by multiple screens, placed on the performance stage, library exhibition, aquarium exhibition, cinema KTV, hotel catering, large supermarkets, government, medical hospitals, enterprise units and other scenarios

The parameters are for reference only. All data are subject to the actual items